



ASTRONERGY



ASTRO N7s

CHSM48RN(DG)/F-BH
Bifacial Series

445~465W

raymann kraft der sonne®


A-2232 Deutsch-Wagram, Hauptstraße 34
office@raymann.at | www.raymann.at
Tel.: +43 2247 21760 | Fax: +43 2247 51243



Warranty

25 25-year Product Warranty

30 30-year Linear Power Warranty

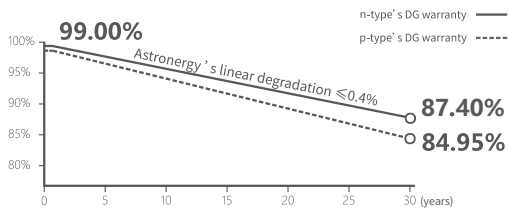

n-type TOPCon 4.0

Novel upgrade, enhancing module efficiency



ZBB Design

Zero-busbar integrated interconnection



Sleek Design

≤ 2 m² area, easy to transport and install



Integrated Appearance

Streamlined design without busbars or harpoon-like ribbons, perfect for upscale zero-carbon buildings



IEC 61215, IEC 61730
ISO 9001:2015:ISO Quality Management System
ISO 14001:2015:ISO Environment Management System
ISO 45001:Occupational Health and Safety
The first solar company which passed the Nord IEC/TS 62941 certification audit



Tier 1
BloombergNEF



445~465W

POWER RANGE

0~+3%


POWER SORTING

23.3%MAX MODULE
EFFICIENCY**≤ 1.0%**FIRST YEAR
POWER DEGRADATION**≤ 0.4%**YEAR 2-30
POWER DEGRADATION

Mechanical Specifications

Outer dimensions (L x W x H)	1762 x 1134 x 30 mm
Cell type	n-type mono-crystalline
No. of cells	96 (6*16)
Frame technology	Aluminum, black or silver anodized
Front / Back glass	2.0+2.0 mm
Cable length (Including connector)	Landscape: 1200 mm; or Customized length
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	6000 Pa (front) / 4000 Pa (back)
Connector type (IEC/UL)	MC4-EVO2A (Standard) / HCB40 (Optional)
Module weight	24.5 kg
Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	927 kg
Modules per 40' HQ container	936 pcs (Subject to sales contract)

① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

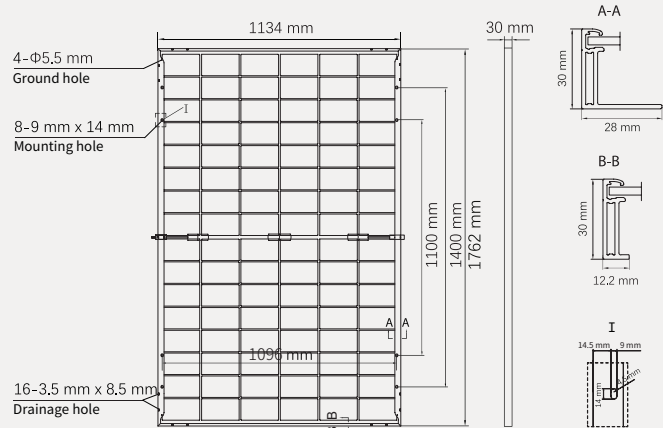

Electrical Specifications

STC: Irradiance 1000W/m², Cell Temperature 25° C, AM=1.5

	445	450	455	460	465
Rated output (Pmpp / Wp)	445	450	455	460	465
Rated voltage (Vmpp / V)	30.20	30.33	30.47	30.60	30.73
Rated current (Impp / A)	14.74	14.83	14.93	15.03	15.13
Open circuit voltage (Voc / V)	36.25	36.42	36.58	36.74	36.90
Short circuit current (Isc / A)	15.57	15.68	15.78	15.88	15.98
Module efficiency	22.3%	22.5%	22.8%	23.0%	23.3%

BNPI: Irradiance: front 1000W/m², rear 135W/m², Cell Temperature 25° C, AM=1.5

	490.4	495.9	501.4	506.9	512.4
Rated output (Pmpp / Wp)	490.4	495.9	501.4	506.9	512.4
Rated voltage (Vmpp / V)	30.21	30.34	30.48	30.61	30.74
Rated current (Impp / A)	16.23	16.34	16.45	16.56	16.67
Open circuit voltage (Voc / V)	36.26	36.43	36.59	36.75	36.91
Short circuit current (Isc / A)	17.24	17.36	17.47	17.58	17.69

Temperature Ratings (STC)

Temperature coefficient (Pmpp)	-0.29%/°C
Temperature coefficient (Isc)	+0.043%/°C
Temperature coefficient (Voc)	-0.25%/°C

Operating Parameters

Bifaciality (Pmpp)	80±5%
Junction box IP rating	IP 68
Max. series fuse rating	35 A
Max. system voltage (IEC/UL)	1500V _{DC}

Curve

